


## Premium Grade Duct Tape

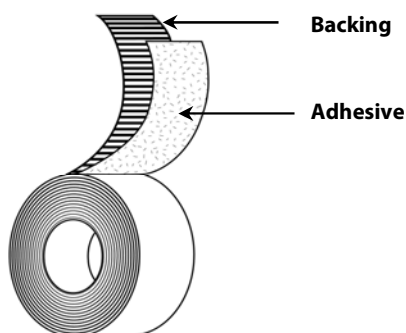

<b>Backing:</b>	PE Coated Cloth
<b>Adhesive:</b>	Rubber
<b>Liner:</b>	N/A
<b>Colors:</b>	Silver, Olive Drab, Black
<b>Specifications:</b>	N/A
<b>Standard Sizes:</b>	48mm x 55M, 72mm x 55M

### Applications

- Waterproof covering for pipe and thermal insulation
- Challenging repair, bundling and seaming applications
- Media-blast protection
- Waterproof packaging

### Features

- PE-Coated Cloth Backing
- Natural Rubber Based Adhesive

### Benefits

- High tensile strength for difficult applications
- Extremely conformable
- Crisp, straight tear
- Moisture, solvent & abrasion resistant
- Aggressive adhesion to all surfaces

### Physical Properties

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness</b>	12 mils	304.8 mic	ASTM D-1000
<b>Adhesion to Steel</b>	90 oz/in	9.85 N/cm	PSTC-101
<b>Tensile Strength</b>	36 lb/in	63.05 N/cm	ASTM D-1000
<b>Operating Temperature</b>	40 to 200 °F	4 to 93 °C	
<b>VOC Content</b>	<1 g/L		

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F  
Standard Shelf Life (at 25C): 36 months from date of manufacture.

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.