


## General Purpose Electrical Tape

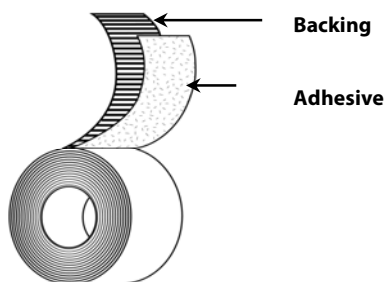

<b>Backing:</b>	PVC Film
<b>Adhesive:</b>	Rubber
<b>Liner:</b>	N/A
<b>Colors:</b>	Blu, Brn, Grn, Gry, Org, Red, Yel, Vio, Wht
<b>Specifications:</b>	UL510 Listed
<b>Standard Sizes:</b>	3/4" x 66Ft

### Applications

- Wire splicing.
- Wire insulation.
- Spiral wrapping electrical wire and harnesses.
- Color coding.

### Features

- PVC Backing
- Rubber Adhesive
- UL510 Listed

### Benefits

- Stretchy and conformable for wrapping wires.
- Durable.
- Conformable.
- Provides a strong long-term bond.
- No flagging or lifting.
- Meets requirements for most electrical applications.

### Physical Properties

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness</b>	7 mils	177.8 mic	ASTM D-1000
<b>Adhesion to Steel</b>	25 oz/in	2.74 N/cm	PSTC-101
<b>Tensile Strength</b>	20 lb/in	35.02 N/cm	ASTM D-1000
<b>Elongation</b>	200%		
<b>Dielectric Strength</b>	9500V		
<b>Operating Temperature</b>	40 - 180° F	4 - 82° C	

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F  
Standard Shelf Life (at 25C): 12 months from date of manufacture.

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are typical values submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.